

A NOISE IMPACT ASSESSMENT FOR

Wilson School Solar Project

Kane County, Illinois

JUNE 16, 2025

PREPARED FOR:



PREPARED BY:

Westwood

Westwood

Noise Impact Assessment

Wilson School Solar Project

Kane County, Illinois

Prepared For:

SunVest Solar, LLC
330 W State Street
Suite 1
Geneva, IL 60134

Prepared By:

Westwood Professional Services
12701 Whitewater Drive
Suite 300
Minnetonka, MN 55343

Project Number: R0069290.00
Date: June 16, 2025

Executive Summary

Westwood Professional Services, Inc. (Westwood) was contracted by SunVest Solar, LLC (Client) to complete a noise assessment for the Wilson School Solar Project (Project) located in Kane County, Illinois. The Project has a proposed nameplate capacity of 5 MW. This noise impact assessment was completed as required by the Kane County Code pursuant to the procedures set forth by the Illinois Pollution Control Board (IPCB).

An operational noise impact evaluation of the Project was conducted for the proposed Project layout. Noise propagation for each inverter was modeled using manufacturer sound data for overall sound pressure level and one-third octave sound pressure levels.

Project-generated noise levels were predicted at all noise sensitive receptors within 1/4 mile of the proposed Project boundary. Noise level regulations include the Kane County Code which requires compliance with octave band noise limits and discrete tone limits set by the IPCB within the Illinois Administrative Code (IAC). Project levels do not exceed the limits set forth in the IAC.

Table of Contents

Executive Summary	i
1.0 Project Background	1
2.0 Regulatory Setting & Noise Level Requirements	2
3.0 Modeling Methodology & Parameters	3
4.0 Noise Level Estimates & Impact Assessment.....	4
5.0 Regulatory Compliance.....	4

Tables

Table 1: Permissible Sound Levels, Class C to Class A (L_{eq})	2
Table 2 Project Equipment & Layout Configuration	3
Table 3 Project Equipment Spectral & Overall Data	3

Figures

Figure 1: Project Overview.....	1
Figure 2: Noise Sensitive Receptor Locations.....	4

Appendices

Appendix A Noise Sensitive Receptor Locations
Appendix B Receptor Octave Band Levels
Appendix C Receptor 1/3 Octave Band Levels

1.0 Project Background

1.1 Site Description

The proposed Project is located in Kane County, Illinois. Noise sensitive receptors in the Project vicinity include residences and church buildings. Existing noise sources in the Project vicinity include local road traffic. The primary land uses in the Project vicinity are residential and agricultural.

1.2 Project Description

The Project is proposed to include solar arrays, solar string inverters, and associated equipment/infrastructure (**Figure 1**).



Figure 1: Project Overview

2.0 Regulatory Setting & Noise Level Requirements

Kane County Code §25-5-4-9 *Commercial Solar Energy Facilities* requires demonstration of compliance with the noise level limits set forth by the IPCB within the IAC. These limits are stated within *IAC Title 35, Subtitle H, Chapter I, Part 901 Sound Emissions Standards and Limitations for Property-Line Noise-Sources*. This regulation regulates noise levels according to the land use where the noise is produced and where the noise is received. Land uses are split into three classes: Class A refers to residences or equally sensitive areas, Class B land is of mixed use, and Class C refers to agricultural and industrial land uses. Class A noise sensitive receptors as defined by the IPCB include dwellings and occupied community buildings, even those on agricultural land. In the absence of field verification of receptor land classification, the most conservative limits were analyzed for this Project – those of noise produced on Class C land impacting Class A land. The daytime and nighttime octave band limits are listed in **Table 1**.

Table 1: Permissible Sound Levels, Class C to Class A (L_{eq})

Sound Level	31.5	63	125	250	500	1000	2000	4000	8000
Daytime (dB)	75	74	69	64	58	52	47	43	40
Nighttime (dB)	69	67	62	54	47	41	36	32	32

Additionally, the IAC prohibits the emission of prominent discrete tones from any property-line noise source located on Class C land to receiving Class A land, when measured at any point within the receiving land at least 25' away from the property-line noise source. A discrete tone is defined as a one-third octave band sound level that exceeds the arithmetic average of the sound pressure levels of the two adjacent one-third octave bands by the following levels: 5 dB if the center frequency is between 500 and 1000 Hz inclusive, by 8 dB if the center frequency is between 160 and 400 Hz inclusive, or by 15 dB if the center frequency is between 25 and 125 Hz inclusive. Discrete tones that have a one-third octave band sound pressure level 10 or more decibels below the allowable octave band sound pressure level specified in **Table 1** are not classified as prominent discrete tones.

3.0 Modeling Methodology & Parameters

A noise propagation model was developed and run for the Project using CADNA-A (a noise modeling software in compliance with ISO 9613-2). The proposed Project string inverters were modeled as omnidirectional point sources. Inverter broadband and spectral noise source data was taken from manufacturer cut sheets and manufacturer provided test report data. As the Project layout locates either 6 or 7 Project inverters at each inverter bank location, the cumulative noise level representative of 6 or 7 inverters respectively was used as a single point source at the center of each inverter bank location.

Model parameters were as follows:

- Ground absorption factor of G=0
- Receptor height of 1.5 m above ground level
- Assumed meteorological conditions of 10°C and 70% humidity
- No other model adjustments

Project equipment and layout configuration details are shown below in **Table 2**. Unweighted octave-band sound power levels for Project inverters are listed in **Table 3** along with overall A-weighted sound power level.

Table 2 Project Equipment & Layout Configuration

Noise Source	# of Units	Equipment Model/Reference	Est. Source Height Above Ground Level (AGL)	Broadband Sound Pressure Level @ 1 m (Single Unit)
Solar Inverter	41	Kaco Blueplanet 125 TL3	0.72 m	59 dBA

Table 3 Project Equipment Spectral & Overall Data

Noise Source	Unweighted Octave Band (Hz) Sound Power Levels (dB L _w)									Broadband Sound Power Level
	31.5	63	125	250	500	1000	2000	4000	8000	
Solar Inverter (Single Unit)	49.0	51.0	56.4	67.7	66.6	62.2	54.9	50.7	40.8	67 dBA
Solar Inverter Bank (Six Units)	56.8	58.7	64.2	75.4	74.4	70.0	62.6	58.4	48.6	75 dBA
Solar Inverter Bank (Seven Units)	57.5	59.4	64.9	76.0	75.1	70.7	63.3	59.1	49.2	76 dBA

Cumulative Project noise was calculated at all noise-sensitive receptors within 1/4 mile of proposed Project infrastructure (**Figure 2**). Note that receptor locations have not been field verified and are based upon aerial imagery only. Receptor location coordinates can be found in **Appendix A**.

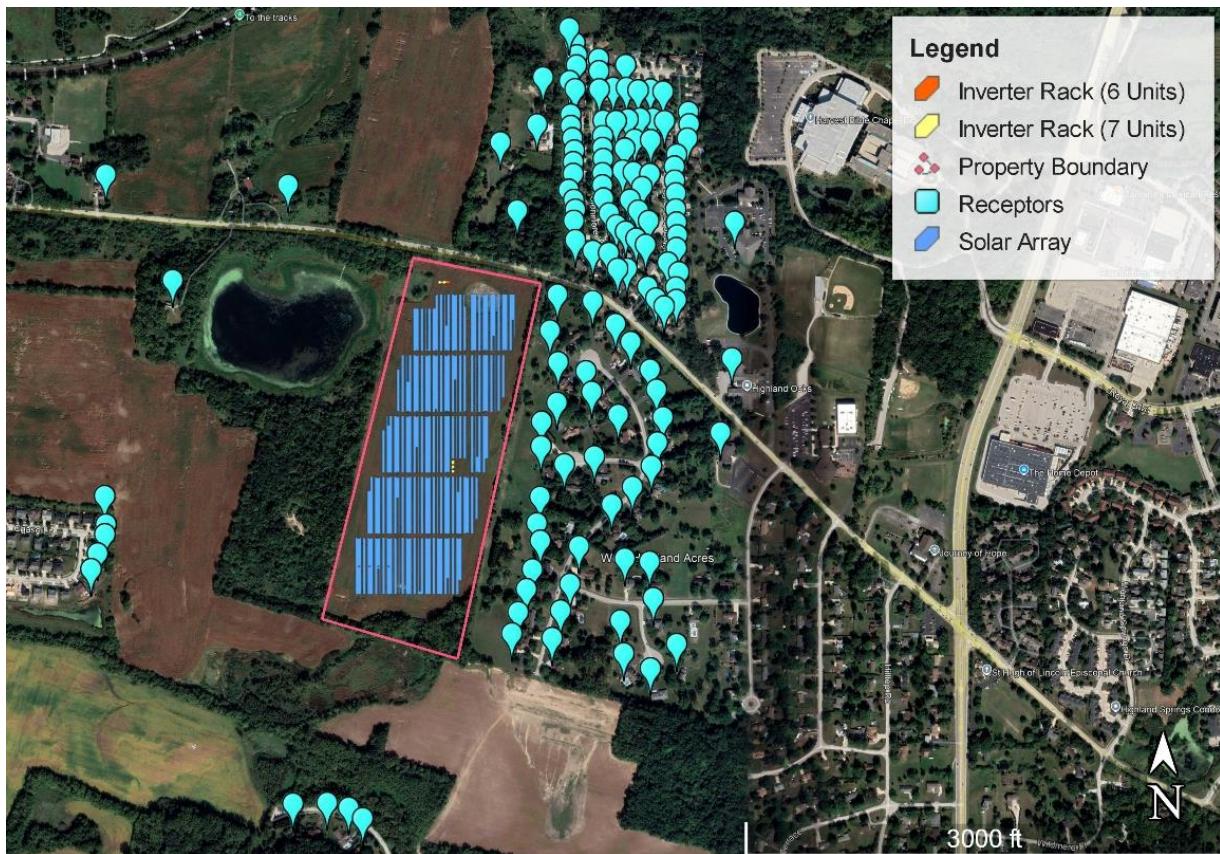


Figure 2: Noise Sensitive Receptor Locations

4.0 Noise Level Estimates & Impact Assessment

Octave band L_{eq} sound pressure levels were calculated for each receptor from 31.5 Hz to 8 kHz. The octave band levels were then compared to the nighttime regulation levels from **Table 1** above, as the nighttime levels are most conservative. No discrete tones were determined to be present when analyzing the one-third octave band levels with regards to the IAC discrete tone criteria. Octave band and third-octave band levels at each receptor can be found in **Appendix B** and **Appendix C**, respectively.

5.0 Regulatory Compliance

All noise sensitive receptors within 1/4 mile of the proposed Project boundary modeled at or below the octave band noise level limits set forth in *IAC Title 35, Subtitle H, Chapter I, Part 901 Sound Emissions Standards and Limitations for Property-Line Noise-Sources*. Additionally, no discrete tones were determined to be present.

Appendix A Noise Sensitive Receptor Locations

Receptor ID	UTM NAD83 Zone 16		Elevation AMSL (m)
	Easting (m)	Northing (m)	
R-1	387865.96	4655551.04	261.51
R-2	387839.18	4655571.13	261.01
R-3	387798.59	4655581.3	261.08
R-4	387355.24	4656030.58	265.02
R-5	387368.45	4656060.2	266.05
R-6	387383.11	4656096.44	266.5
R-7	387385.52	4656114.86	267.07
R-8	387384.62	4656169.04	270.33
R-9	387393.78	4656779	269.15
R-10	388178.52	4656698.33	270.9
R-11	388148.23	4656828.01	272.56
R-12	388218.72	4656861.42	270.88
R-13	388232.02	4656952.01	266.83
R-14	388283.59	4657045.14	267.45
R-15	388293.94	4657016.67	267.17
R-16	388297.74	4656993.02	267.25
R-17	388296.25	4656973.78	266.87
R-18	388282.51	4656943.95	266.82
R-19	388293.01	4656928.09	267.87
R-20	388283.61	4656879.57	269.5
R-21	388283.3	4656857.54	269.5
R-22	388286.11	4656834.07	269.17
R-23	388289.35	4656810.97	268.28
R-24	388287	4656788.91	267.7
R-25	388286.61	4656766.57	267.5
R-26	388277.54	4656736.46	267.67
R-27	388286.91	4656717.1	267.65
R-28	388289.44	4656698.39	268.25
R-29	388286.23	4656677.23	268.5
R-30	388288.41	4656640.45	268.82
R-31	388321.48	4656619.1	269.5
R-32	388351.6	4656614.75	269.5
R-33	388368.14	4656584.5	269.92
R-34	388385.94	4656584.31	269.5
R-35	388424.76	4656549.24	268.82
R-36	388440.22	4656526.83	268.71
R-37	388455.56	4656511.55	268.6
R-38	388319.58	4656524.04	267.83
R-39	388252.61	4656537.48	267.79
R-40	388237.26	4656469.44	266.74
R-41	388251.82	4656409.17	266.43
R-42	388304.61	4656391.08	266.5
R-43	388248.34	4656332.12	266.5
R-44	388364.63	4656307.31	267.94
R-45	388218.37	4656296.59	266.5
R-46	388216.43	4656250.07	266.55
R-47	388260.42	4656215.14	267.5
R-48	388317.91	4656229.36	267.5

R-49	388213.1	4656154.2	265.81
R-50	388206.18	4656103.98	265.65
R-51	388212.31	4656071	266.02
R-52	388196.24	4656016.94	265.8
R-53	388184.22	4655979.95	266.47
R-54	388167.87	4655936.74	267.65
R-55	388155.18	4655896.59	268.16
R-56	388338.91	4656985.39	267.5
R-57	388339.1	4656962.02	267.5
R-58	388338.79	4656927.01	268.45
R-59	388365.55	4656929.3	269.48
R-60	388391.06	4656928.63	269.5
R-61	388413.11	4656923.74	269.24
R-62	388436.7	4656924.88	269.17
R-63	388460.91	4656920.37	269.5
R-64	388345.49	4656866.87	269.5
R-65	388370.03	4656865.74	269.5
R-66	388392.72	4656868.55	269.5
R-67	388416.01	4656870.06	269.5
R-68	388440.59	4656869.4	269.38
R-69	388462.71	4656864.24	269.2
R-70	388508.61	4656880.92	269.5
R-71	388509.64	4656857.53	268.5
R-72	388344.1	4656837.61	269.36
R-73	388343.52	4656815.23	267.87
R-74	388385.81	4656813.32	267.5
R-75	388404.95	4656830.02	267.93
R-76	388435.69	4656828.73	267.67
R-77	388505.91	4656830.59	267.5
R-78	388344.45	4656794.31	267.41
R-79	388381.3	4656771.86	266.63
R-80	388401.67	4656768.29	266.86
R-81	388433.37	4656764.54	266.5
R-82	388484.92	4656800.53	266.77
R-83	388480.33	4656777.87	266.5
R-84	388342.62	4656767.31	266.66
R-85	388342.03	4656744.12	266.5
R-86	388343.49	4656718.83	267.5
R-87	388353.82	4656690.33	267.5
R-88	388367.48	4656667.6	268.5
R-89	388384.74	4656654.89	268.5
R-90	388404.49	4656641.16	269.5
R-91	388422.29	4656629.08	269.5
R-92	388463.84	4656594.74	269.5
R-93	388484.75	4656576.08	269.5
R-94	388478.47	4656547.46	269.5
R-95	388478.95	4656523.36	269.27
R-96	388417.66	4656739.56	267.32
R-97	388394.1	4656715.92	267.38
R-98	388409.73	4656694.8	267.5
R-99	388429.01	4656674.77	267.87

R-100	388480.33	4656751.02	266.5
R-101	388482.11	4656726.68	267.2
R-102	388481.19	4656695.97	267.87
R-103	388482.08	4656670.75	268.5
R-104	388483.04	4656646.31	269.06
R-105	388480.99	4656622.02	269.5
R-106	388390.37	4656972.71	268.4
R-107	388593.04	4656670.7	268.5
R-108	388582.87	4656411.1	269.91
R-109	388558.46	4656270.86	269.5
R-110	388362.47	4656479.75	267.53
R-111	388390.91	4656445.17	267.51
R-112	388426.67	4656392.08	268.4
R-113	388438.39	4656353.74	268.5
R-114	388449.6	4656301.38	269.08
R-115	388438.02	4656253.61	268.5
R-116	388426.01	4656209.53	268.5
R-117	388389.38	4656170.23	268.19
R-118	388349.39	4656137.6	267.5
R-119	388285.55	4656059.43	266.5
R-120	388372.5	4656034.67	267.48
R-121	388419.57	4656028.22	267.33
R-122	388267.4	4655988.42	266.67
R-123	388248.5	4655938.59	268.47
R-124	388231.57	4655887.06	268.5
R-125	388425.5	4655959.19	267.5
R-126	388361.8	4655918.02	268.07
R-127	388367.3	4655855.88	268.5
R-128	388417.43	4655826.84	269.75
R-129	388468.13	4655872.03	268.58
R-130	388315.05	4656351.75	266.5
R-131	387520.61	4656575.47	278.33
R-132	387741.78	4656753.81	271.5
R-133	387733.42	4655580.58	260.94

Appendix B Receptor Octave Band Levels

	31.5	63	125	250	500	1000	2000	4000	8000
Nighttime Regulation	69	67	62	54	47	41	36	32	32
R-1	-42.9	-27.9	-12.7	5.5	9.1	7.2	-3.4	-20.4	-72.7
R-2	-42.8	-27.8	-12.5	5.6	9.2	7.3	-3.1	-19.9	-71.8
R-3	-42.8	-27.8	-12.5	5.6	9.2	7.3	-3.2	-20.0	-72.1
R-4	-42.4	-27.3	-12.1	6.1	9.7	7.9	-2.5	-19.5	-72.3
R-5	-42.1	-27.1	-11.8	6.4	10.0	8.2	-2.1	-18.7	-70.6
R-6	-41.8	-26.7	-11.5	6.7	10.4	8.6	-1.6	-17.8	-68.6
R-7	-41.7	-26.6	-11.4	6.9	10.5	8.7	-1.4	-17.6	-68.0
R-8	-41.5	-26.4	-11.2	7.1	10.8	8.9	-1.1	-17.1	-67.1
R-9	-41.6	-26.6	-11.3	6.9	10.6	8.7	-1.4	-17.4	-66.9
R-10	-27.2	-12.1	3.4	22.0	26.2	24.8	17.5	9.8	-12.0
R-11	-32.0	-17.0	-1.5	16.9	21.1	19.6	11.7	2.4	-23.7
R-12	-36.4	-21.3	-5.9	12.5	16.5	14.9	6.6	-4.0	-34.0
R-13	-38.3	-23.4	-8.3	9.6	12.8	10.6	0.4	-13.7	-51.1
R-14	-40.0	-24.9	-9.7	8.6	12.2	10.4	0.6	-13.7	-55.0
R-15	-39.7	-24.7	-9.4	8.8	12.4	10.5	0.7	-13.5	-54.1
R-16	-39.4	-24.4	-9.1	9.1	12.7	10.8	1.0	-13.0	-52.8
R-17	-39.2	-24.1	-8.9	9.2	12.7	10.7	0.6	-13.6	-53.1
R-18	-38.7	-23.7	-8.6	9.4	12.5	10.4	0.1	-14.3	-52.9
R-19	-38.5	-23.5	-8.3	9.8	13.2	11.2	1.3	-12.5	-50.2
R-20	-37.6	-22.5	-7.1	11.3	15.2	13.6	4.9	-6.6	-39.7
R-21	-37.2	-22.2	-6.7	11.7	15.7	14.1	5.7	-5.3	-37.0
R-22	-36.9	-21.8	-6.4	12.0	16.0	14.5	6.2	-4.6	-35.6
R-23	-36.6	-21.5	-6.1	12.3	16.4	14.8	6.6	-4.0	-34.4
R-24	-36.2	-21.2	-5.8	12.7	16.7	15.2	6.9	-3.6	-33.6
R-25	-35.9	-20.8	-5.4	13.0	17.0	15.5	7.0	-3.6	-33.4
R-26	-35.3	-20.2	-4.8	13.6	17.6	16.1	7.7	-2.6	-31.3
R-27	-35.3	-20.2	-4.7	13.7	17.8	16.3	8.3	-1.6	-29.6
R-28	-35.1	-20.0	-4.6	13.9	18.0	16.5	8.6	-1.1	-28.7
R-29	-34.8	-19.7	-4.3	14.2	18.3	16.8	8.9	-0.6	-27.7
R-30	-29.8	-14.7	0.7	19.2	23.3	21.9	14.0	4.5	-22.4
R-31	-30.5	-15.4	0.0	18.5	22.6	21.1	13.0	3.0	-25.9
R-32	-32.7	-17.6	-2.2	16.2	20.3	18.7	10.4	-0.4	-31.2
R-33	-31.4	-16.3	-0.9	17.6	21.6	20.1	11.8	1.0	-30.7
R-34	-31.7	-16.6	-1.2	17.2	21.2	19.7	11.3	0.2	-32.5
R-35	-32.3	-17.3	-1.9	16.5	20.5	19.0	10.4	-1.3	-36.4
R-36	-32.6	-17.5	-2.1	16.3	20.3	18.7	10.1	-1.8	-37.9
R-37	-32.8	-17.7	-2.3	16.1	20.0	18.4	9.7	-2.4	-39.4
R-38	-30.2	-15.1	0.3	18.8	22.9	21.4	13.3	3.2	-26.7
R-39	-28.6	-13.5	1.9	20.4	24.6	23.2	15.5	6.4	-19.6
R-40	-28.4	-13.3	2.2	20.7	24.9	23.4	15.7	6.6	-20.3
R-41	-28.6	-13.5	1.9	20.4	24.6	23.2	15.4	6.2	-21.0
R-42	-29.8	-14.7	0.8	19.2	23.4	21.9	13.9	4.0	-25.1
R-43	-28.2	-13.1	2.4	20.9	25.1	23.6	16.1	7.3	-17.6
R-44	-31.1	-16.0	-0.6	17.9	21.9	20.4	12.2	1.6	-29.3
R-45	-27.1	-12.0	3.5	22.0	26.2	24.9	17.5	9.5	-13.1
R-46	-27.1	-12.0	3.5	22.0	26.3	24.9	17.5	9.7	-12.6
R-47	-28.9	-13.8	1.7	20.2	24.3	22.9	15.3	6.5	-18.5
R-48	-30.3	-15.2	0.2	18.7	22.8	21.3	13.3	3.6	-24.5

R-49	-28.4	-13.3	2.2	20.7	24.9	23.5	16.0	7.6	-16.2
R-50	-29.3	-14.2	1.2	19.7	23.9	22.4	14.8	5.9	-19.3
R-51	-30.2	-15.1	0.3	18.8	22.9	21.5	13.6	4.3	-22.5
R-52	-31.2	-16.1	-0.6	17.8	21.9	20.4	12.3	2.4	-26.3
R-53	-31.8	-16.7	-1.3	17.1	21.2	19.6	11.4	1.0	-29.1
R-54	-32.6	-17.5	-2.1	16.3	20.3	18.8	10.3	-0.6	-32.5
R-55	-33.3	-18.2	-2.8	15.6	19.5	18.0	9.3	-2.2	-35.9
R-56	-39.7	-24.6	-9.3	8.9	12.6	10.7	1.0	-13.1	-53.5
R-57	-39.4	-24.3	-9.0	9.2	12.9	11.1	1.4	-12.3	-51.8
R-58	-38.9	-23.8	-8.5	9.9	13.8	12.1	3.1	-9.4	-46.2
R-59	-39.2	-24.1	-8.8	9.6	13.4	11.8	2.8	-10.0	-47.7
R-60	-39.5	-24.4	-9.1	9.3	13.1	11.5	2.3	-10.7	-49.5
R-61	-39.7	-24.6	-9.2	9.1	12.9	11.2	2.0	-11.2	-50.7
R-62	-39.9	-24.9	-9.5	8.8	12.6	10.9	1.6	-12.0	-52.5
R-63	-40.1	-25.1	-9.7	8.6	12.4	10.7	1.3	-12.6	-54.1
R-64	-38.2	-23.1	-7.7	10.6	14.6	13.0	4.3	-7.6	-42.3
R-65	-38.5	-23.4	-8.1	10.3	14.2	12.6	3.8	-8.4	-44.1
R-66	-38.8	-23.8	-8.4	10.0	13.9	12.2	3.3	-9.2	-46.0
R-67	-39.1	-24.1	-8.7	9.6	13.5	11.9	2.8	-10.0	-47.9
R-68	-39.4	-24.4	-9.0	9.3	13.2	11.5	2.4	-10.8	-49.8
R-69	-39.6	-24.6	-9.2	9.1	12.9	11.3	2.0	-11.4	-51.4
R-70	-40.3	-25.3	-9.9	8.4	12.2	10.4	0.9	-13.2	-55.8
R-71	-40.1	-25.1	-9.7	8.5	12.4	10.6	1.2	-12.8	-54.9
R-72	-37.8	-22.7	-7.3	11.0	15.0	13.4	4.8	-6.7	-40.4
R-73	-37.5	-22.5	-7.1	11.3	15.3	13.8	5.2	-6.2	-39.2
R-74	-38.1	-23.1	-7.7	10.7	14.6	13.0	4.3	-7.7	-42.7
R-75	-38.6	-23.5	-8.1	10.2	14.1	12.5	3.6	-8.7	-45.0
R-76	-39.0	-23.9	-8.6	9.8	13.7	12.0	3.0	-9.7	-47.5
R-77	-39.9	-24.8	-9.5	8.8	12.6	10.9	1.6	-12.2	-53.5
R-78	-37.3	-22.2	-6.8	11.6	15.6	14.0	5.4	-5.9	-38.6
R-79	-37.7	-22.6	-7.2	11.2	15.2	13.6	5.0	-6.6	-40.4
R-80	-37.9	-22.9	-7.5	10.9	14.9	13.3	4.6	-7.3	-42.0
R-81	-38.4	-23.3	-8.0	10.4	14.3	12.7	3.9	-8.4	-44.7
R-82	-39.4	-24.3	-9.0	9.3	13.2	11.5	2.4	-10.9	-50.5
R-83	-39.2	-24.1	-8.7	9.6	13.5	11.8	2.7	-10.4	-49.3
R-84	-37.0	-21.9	-6.5	11.9	15.9	14.3	5.8	-5.3	-37.4
R-85	-36.7	-21.6	-6.2	12.2	16.2	14.7	6.3	-4.6	-36.0
R-86	-36.5	-21.4	-6.0	12.5	16.5	15.0	6.7	-4.0	-34.8
R-87	-36.4	-21.4	-5.9	12.5	16.5	15.0	6.7	-4.0	-35.0
R-88	-36.5	-21.5	-6.0	12.4	16.4	14.9	6.5	-4.3	-35.9
R-89	-36.8	-21.7	-6.3	12.1	16.1	14.6	6.2	-5.0	-37.4
R-90	-34.4	-19.3	-3.9	14.5	18.6	17.0	8.6	-2.5	-35.4
R-91	-37.3	-22.3	-6.9	11.5	15.5	13.9	5.3	-6.3	-40.8
R-92	-35.3	-20.3	-4.9	13.5	17.4	15.8	6.9	-5.9	-43.9
R-93	-35.5	-20.4	-5.1	13.3	17.2	15.6	6.6	-6.4	-45.6
R-94	-33.2	-18.2	-2.8	15.6	19.5	17.9	9.1	-3.4	-41.3
R-95	-33.2	-18.1	-2.7	15.6	19.6	18.0	9.1	-3.3	-41.4
R-96	-38.0	-22.9	-7.5	10.9	14.8	13.2	4.5	-7.4	-42.4
R-97	-37.4	-22.3	-6.9	11.5	15.5	13.9	5.4	-6.1	-39.5
R-98	-37.5	-22.4	-7.0	11.4	15.4	13.8	5.2	-6.5	-40.5
R-99	-37.7	-22.6	-7.2	11.2	15.1	13.5	4.9	-7.0	-42.0

R-100	-39.0	-23.9	-8.6	9.8	13.7	12.0	3.0	-10.0	-48.5
R-101	-38.8	-23.8	-8.4	9.9	13.8	12.2	3.2	-9.7	-48.0
R-102	-38.6	-23.6	-8.2	10.1	14.0	12.4	3.4	-9.3	-47.3
R-103	-38.5	-23.5	-8.1	10.3	14.2	12.6	3.6	-9.1	-47.0
R-104	-35.9	-20.9	-5.5	12.8	16.7	15.1	6.0	-7.2	-46.3
R-105	-35.7	-20.7	-5.3	13.0	16.9	15.3	6.2	-6.8	-45.8
R-106	-40.0	-24.9	-9.6	8.7	12.6	10.9	1.6	-12.0	-52.4
R-107	-40.1	-25.0	-9.7	8.6	12.4	10.7	1.2	-13.1	-57.1
R-108	-34.7	-19.6	-4.3	14.0	17.9	16.2	6.9	-7.0	-50.4
R-109	-34.5	-19.5	-4.1	14.2	18.1	16.4	7.2	-6.4	-47.8
R-110	-31.0	-16.0	-0.5	17.9	22.0	20.4	12.2	1.3	-31.2
R-111	-31.6	-16.5	-1.1	17.4	21.4	19.9	11.5	0.2	-33.7
R-112	-32.2	-17.1	-1.7	16.7	20.7	19.1	10.6	-1.1	-36.3
R-113	-32.4	-17.4	-2.0	16.4	20.4	18.8	10.3	-1.5	-36.9
R-114	-32.7	-17.7	-2.3	16.1	20.1	18.5	9.9	-2.1	-37.6
R-115	-32.7	-17.6	-2.2	16.2	20.2	18.6	10.0	-1.8	-36.4
R-116	-32.7	-17.6	-2.2	16.2	20.2	18.6	10.0	-1.6	-35.7
R-117	-32.3	-17.2	-1.8	16.6	20.6	19.1	10.6	-0.5	-33.0
R-118	-31.8	-16.7	-1.3	17.1	21.2	19.6	11.3	0.7	-30.2
R-119	-31.7	-16.6	-1.2	17.3	21.3	19.8	11.6	1.2	-28.9
R-120	-33.3	-18.3	-2.9	15.5	19.5	17.9	9.2	-2.7	-37.3
R-121	-34.0	-19.0	-3.6	14.7	18.6	17.0	8.1	-4.4	-41.5
R-122	-32.6	-17.5	-2.1	16.3	20.3	18.8	10.3	-0.7	-32.9
R-123	-33.2	-18.1	-2.8	15.6	19.6	18.0	9.4	-2.1	-35.9
R-124	-33.9	-18.9	-3.5	14.9	18.8	17.2	8.4	-3.8	-39.5
R-125	-34.8	-19.8	-4.4	13.9	17.8	16.1	6.9	-6.3	-45.8
R-126	-34.6	-19.6	-4.2	14.1	18.0	16.3	7.2	-5.7	-44.1
R-127	-35.4	-20.4	-5.0	13.3	17.1	15.4	6.0	-7.7	-48.9
R-128	-36.1	-21.1	-5.8	12.5	16.2	14.5	4.8	-9.7	-53.9
R-129	-36.1	-21.1	-5.8	12.5	16.3	14.5	4.8	-9.8	-54.1
R-130	-30.0	-14.9	0.6	19.0	23.2	21.7	13.7	3.8	-25.1
R-131	-34.6	-19.5	-4.2	14.1	18.0	16.3	7.1	-6.6	-48.6
R-132	-34.9	-19.8	-4.4	14.0	17.9	16.4	7.7	-3.7	-35.4
R-133	-43.1	-28.0	-12.8	5.4	8.9	7.0	-3.6	-20.9	-74.0

R-125	-56.8	-43.5	-30.8	-30.0	-24.4	-19.9	-18.2	-11.3	-3.2	4.2	9.8	12.2	2.8	12.3	17.3	14.6	6.5	1.4	5.3	-1.6	-1.9	-6.7	-15.6	-26.2	-44.8	-68.0	-82.7
R-126	-56.6	-43.3	-30.6	-29.8	-24.2	-19.6	-18.0	-11.1	-3.0	4.4	10.1	12.4	3.1	12.5	17.6	14.9	6.8	1.7	5.6	-1.2	-1.4	-6.1	-14.8	-25.0	-43.1	-65.6	-82.6
R-127	-57.4	-44.1	-31.4	-30.6	-25.0	-20.5	-18.8	-11.9	-3.8	3.6	9.2	11.6	2.2	11.6	16.6	13.9	5.8	0.7	4.5	-2.5	-3.0	-8.1	-17.3	-28.4	-47.9	-72.0	-82.7
R-128	-58.1	-44.8	-32.1	-31.3	-25.7	-21.2	-19.6	-12.7	-4.6	2.8	8.4	10.8	1.4	10.8	15.8	13.0	4.8	-0.3	3.4	-3.8	-4.5	-10.0	-19.9	-32.0	-52.9	-77.5	-82.7
R-129	-58.1	-44.8	-32.1	-31.3	-25.7	-21.2	-19.5	-12.6	-4.5	2.8	8.5	10.8	1.4	10.8	15.8	13.1	4.9	-0.3	3.4	-3.8	-4.5	-10.0	-19.9	-32.1	-53.1	-77.6	-82.7
R-130	-51.9	-38.6	-25.9	-25.1	-19.5	-14.9	-13.3	-6.3	1.8	9.2	15.0	17.4	8.1	17.6	22.8	20.2	12.2	7.5	11.8	5.6	6.2	2.9	-3.7	-10.9	-24.2	-39.6	-61.4
R-131	-56.5	-43.2	-30.5	-29.8	-24.2	-19.6	-18.0	-11.1	-3.0	4.4	10.1	12.4	3.1	12.5	17.6	14.9	6.7	1.7	5.5	-1.4	-1.9	-6.9	-16.3	-27.7	-47.6	-72.1	-82.7
R-132	-56.8	-43.5	-30.8	-30.0	-24.4	-19.9	-18.2	-11.3	-3.2	4.2	9.9	12.3	3.0	12.4	17.5	14.9	6.8	1.9	6.0	-0.6	-0.4	-4.4	-11.8	-20.0	-34.5	-51.7	-75.2
R-133	-65.0	-51.7	-39.0	-38.2	-32.7	-28.1	-26.5	-19.6	-11.6	-4.3	1.3	3.6	-5.9	3.5	8.4	5.6	-2.8	-8.2	-4.9	-12.6	-14.2	-21.0	-32.9	-48.1	-73.0	-81.3	-82.7